

Oil Seals ออยซีลเพลาหมุน

SEALPRO
mechanical seal






Oil Seals					
Design	Ref.	Material	Pressure (BAR)	Temp. (°C)	Dim. mm. inch.
	TC	NBR-Metal	0.5	-35 +100	• •
	R	NBR-Metal	0.5	-35 +100	• •
	FTC	NBR-Metal	0.5	-35 +100	• •
	GR	Viton [®] -Metal	0.5	-30 +200	• •
	GVP	Metal-NBR, Silicone FPM, PTFE	0.5	Depend on material	• •
	GVPST	Metal-NBR, Silicone FPM, PTFE	0.5	Depend on material	• •
	VC	NBR-Metal	-	-35 +100	• •
	VB	NBR-Metal	-	-35 +100	• •
	UN UN/SPLIT	NBR-Fabric	-	-35 +100	•
	PS	Stainless Steel, PTFE	2	-60 +200	• •
	TCN	NBR-Metal	10	-35 +100	•
	SP-11-2510	PTFE-Stainless Spring	150	-100 +260	• •

ออยซีล : TC

SEALPRO
mechanical seal

SPECIFICATION

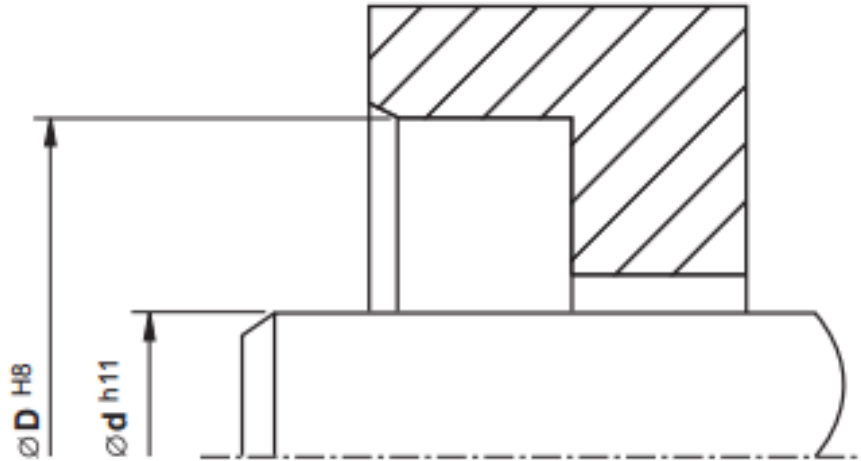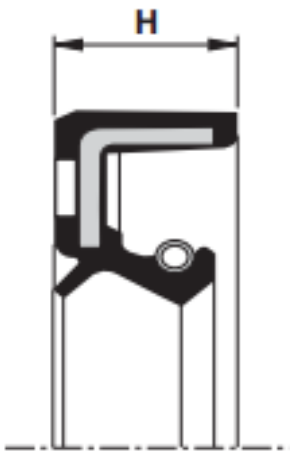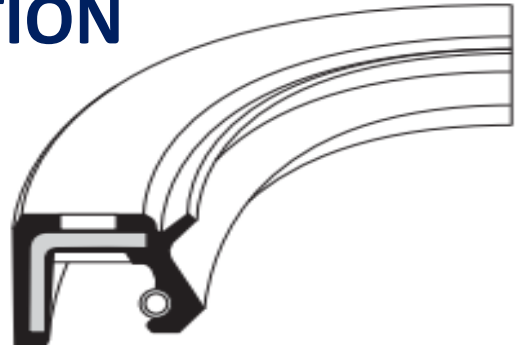

- Good static sealing.
- Effective protection against contaminants.
- Higher surface roughness is allowed.
- Installation in split housing.

Material : NBR-Metal , Pressure (Bar): 0.5 , Temp. (°C) : -35 + 100

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออกซีล : R

SEALPRO
mechanical seal

SPECIFICATION

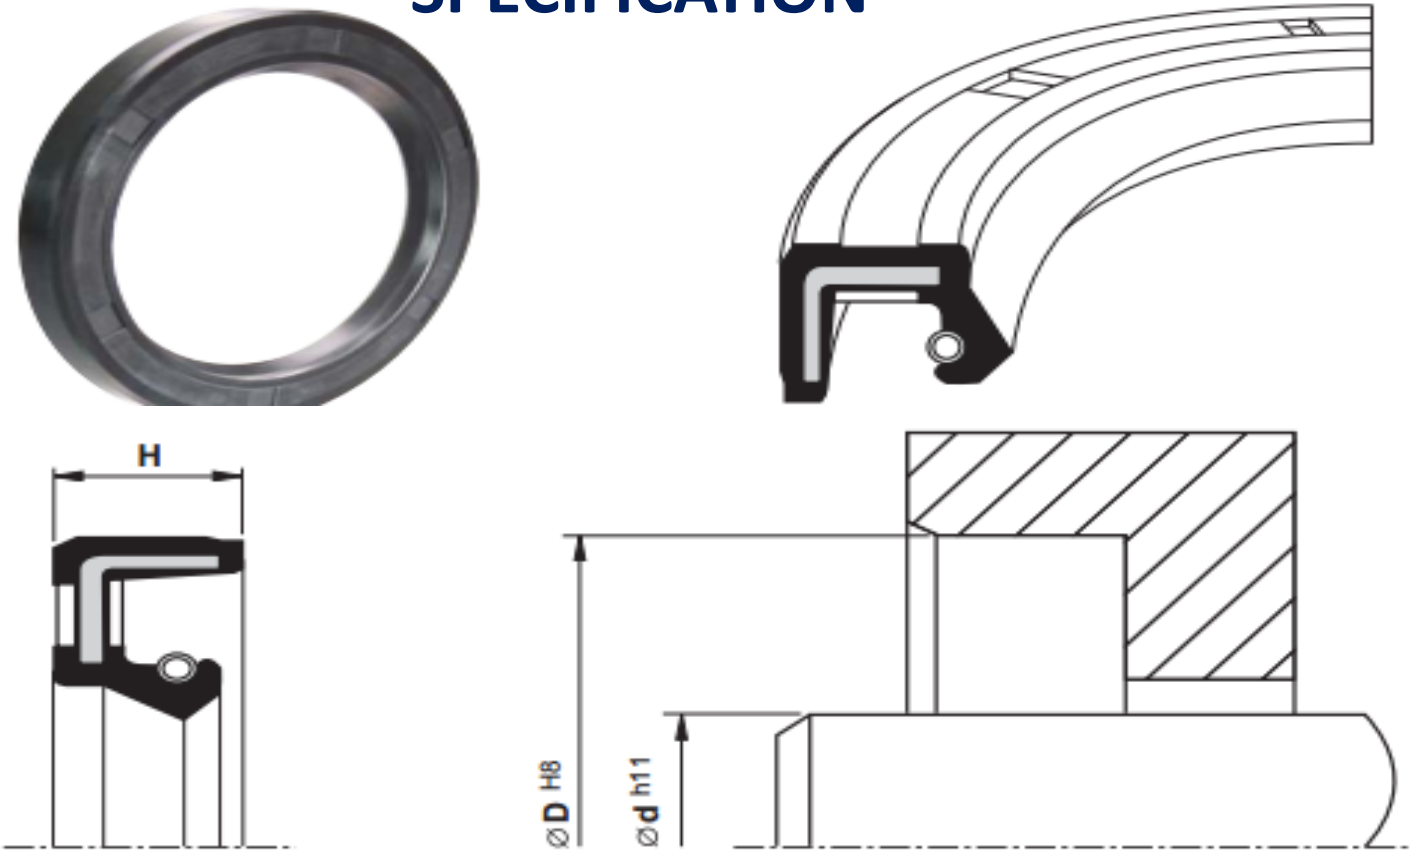

- Good static sealing.
- Compensation of different thermal expansion.
- No risk of fretting corrosion.
- Modern lip design.

Material : NBR-Metal , Pressure (Bar): 0.5 , Temp. (°C) : -35 + 100

H=..... D=..... d=.....




www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : **FTC**

SEALPRO
mechanical seal

SPECIFICATION

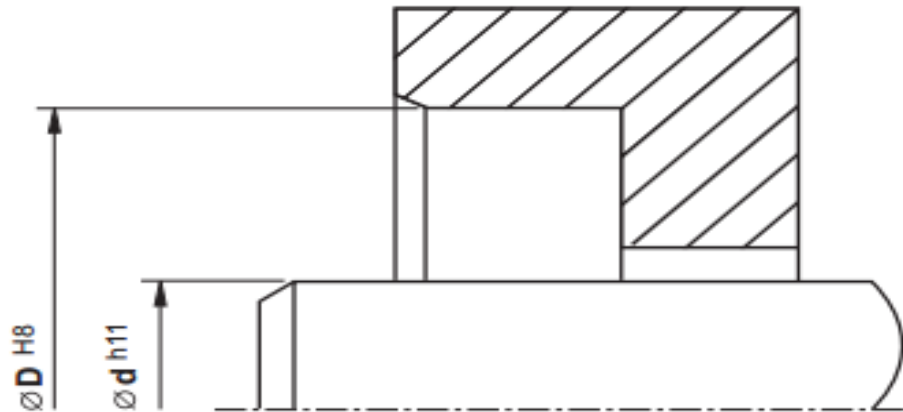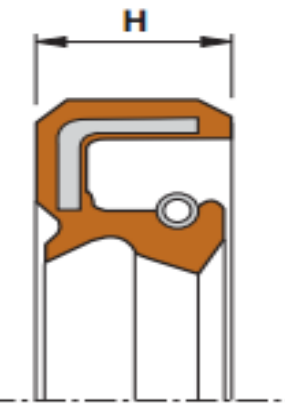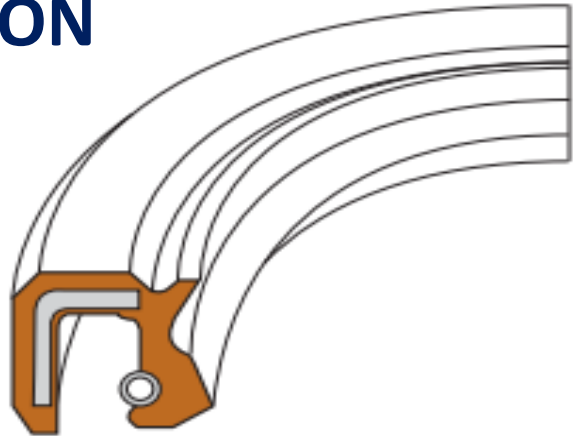

- Compensation of different thermal expansion.
- No risk of fretting corrosion.
- Effective protection against outside contaminants.
- Modern lip design.

Material : FKM-Metal , Pressure (Bar): 0.5 , Temp. ($^{\circ}$ C) : -35 + 200

H=..... D=..... d=.....




www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : GR

SEALPRO
mechanical seal

SPECIFICATION

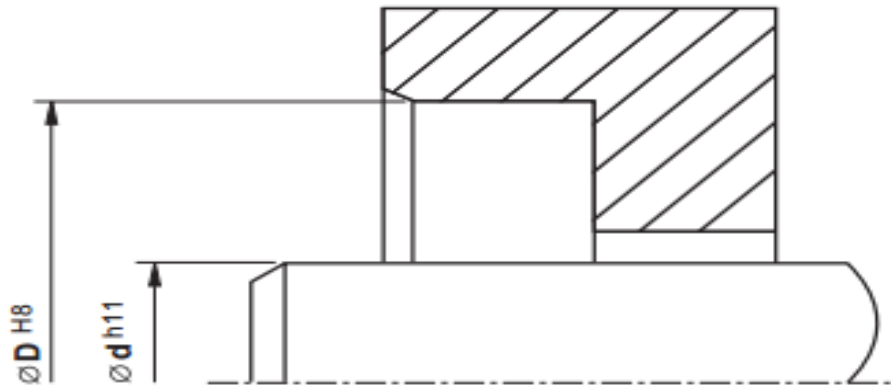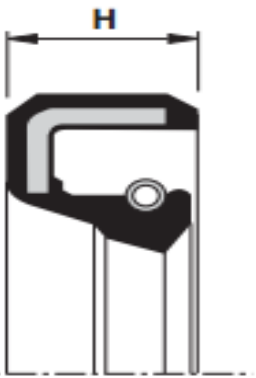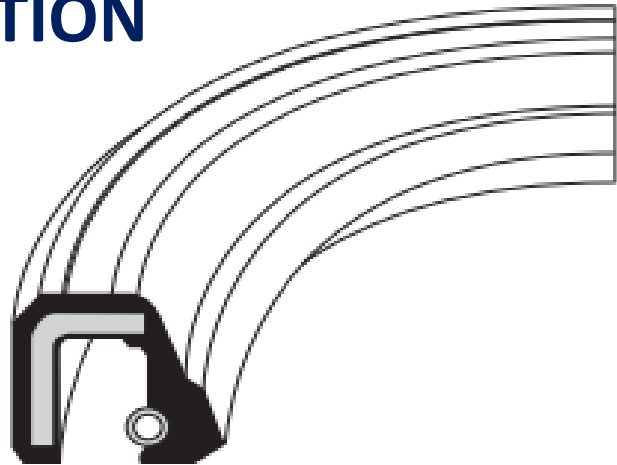

- Made from original VITON[®] material from dupont.
- Compensation of different thermal expansion.
- No risk of fretting corrosion. • Good chemical resistance.

Material : Viton-Metal , Pressure (Bar): 0.5 , Temp. (°C) : -35 + 200

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : GVR

SEALPRO
mechanical seal

SPECIFICATION

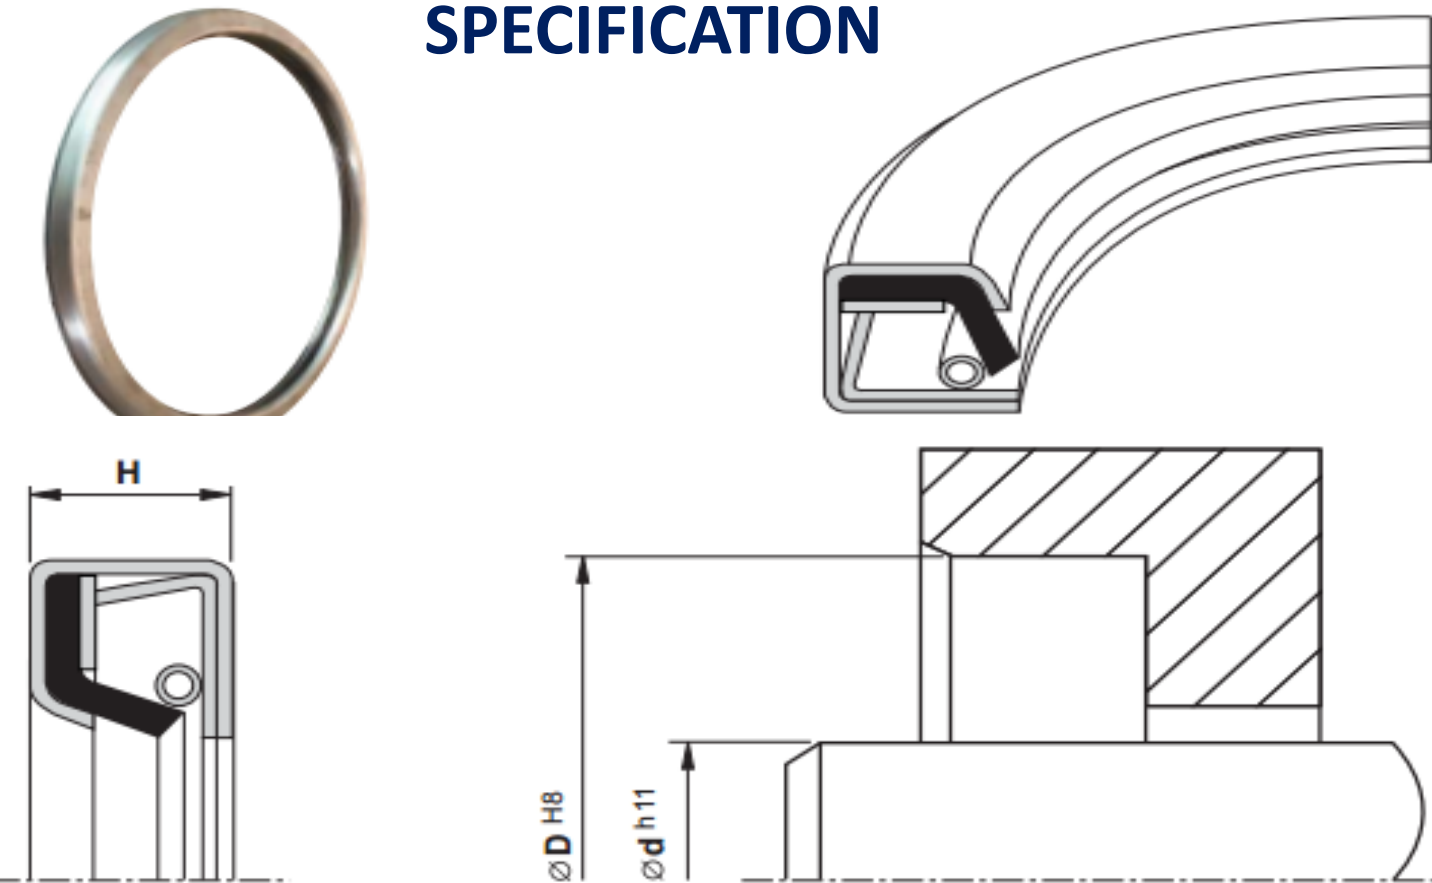

- Good chemical resistance.

Material : FPM – METAL , Pressure (Bar):5 , Temp. (°C) : -40 + 100

Material : FPM – FPM , Pressure (Bar):5 , Temp. (°C) : -30 + 200

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : **GVST**

SEALPRO
mechanical seal

SPECIFICATION

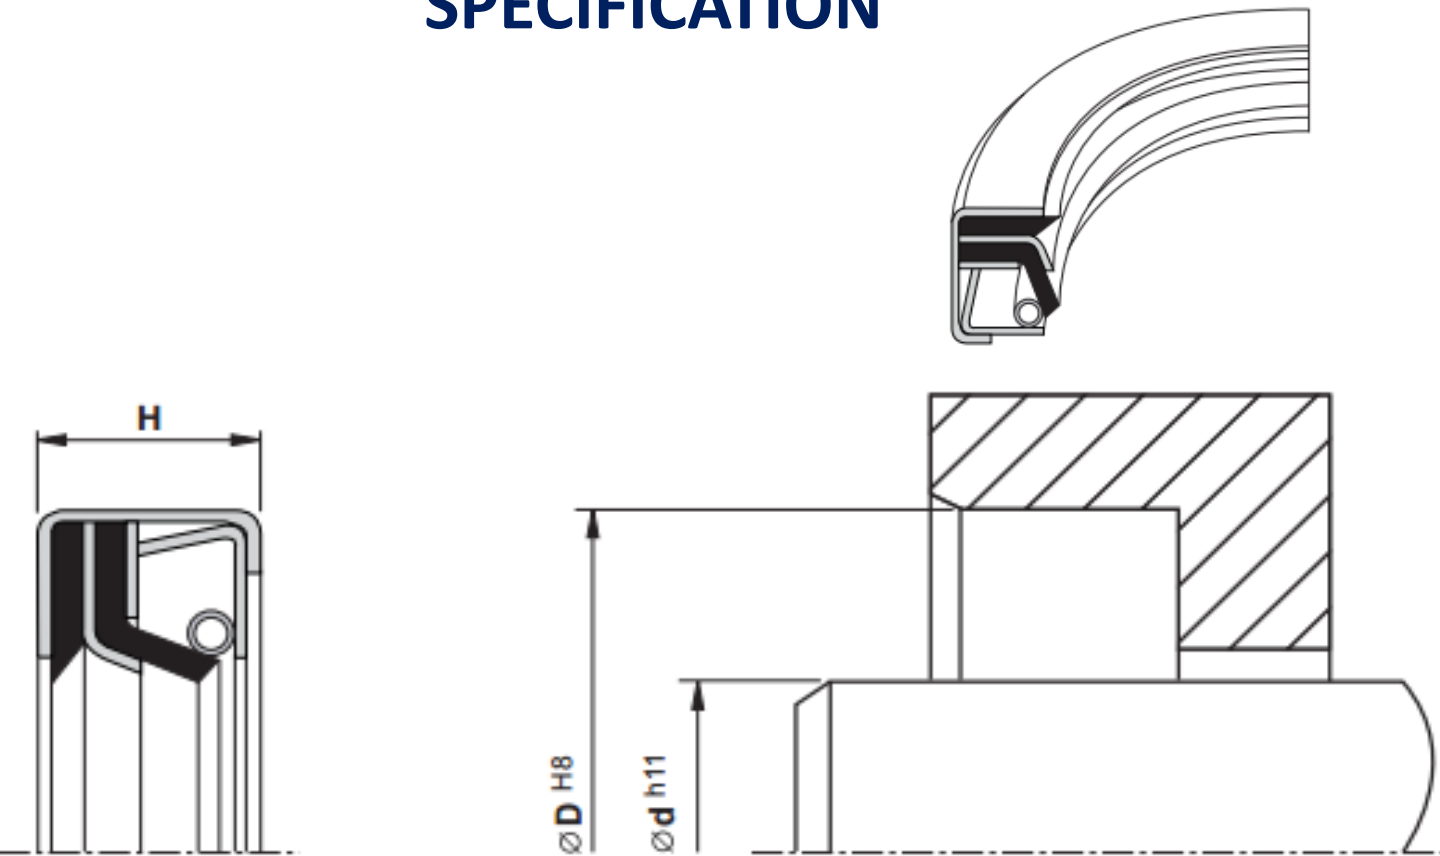

- Good chemical resistance.

Material : FPM – METAL , Pressure (Bar):5 , Temp. (°C) : -40 + 100

Material : FPM – FPM , Pressure (Bar):5 , Temp. (°C) : -30 + 200

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : VC

SEALPRO
mechanical seal

SPECIFICATION

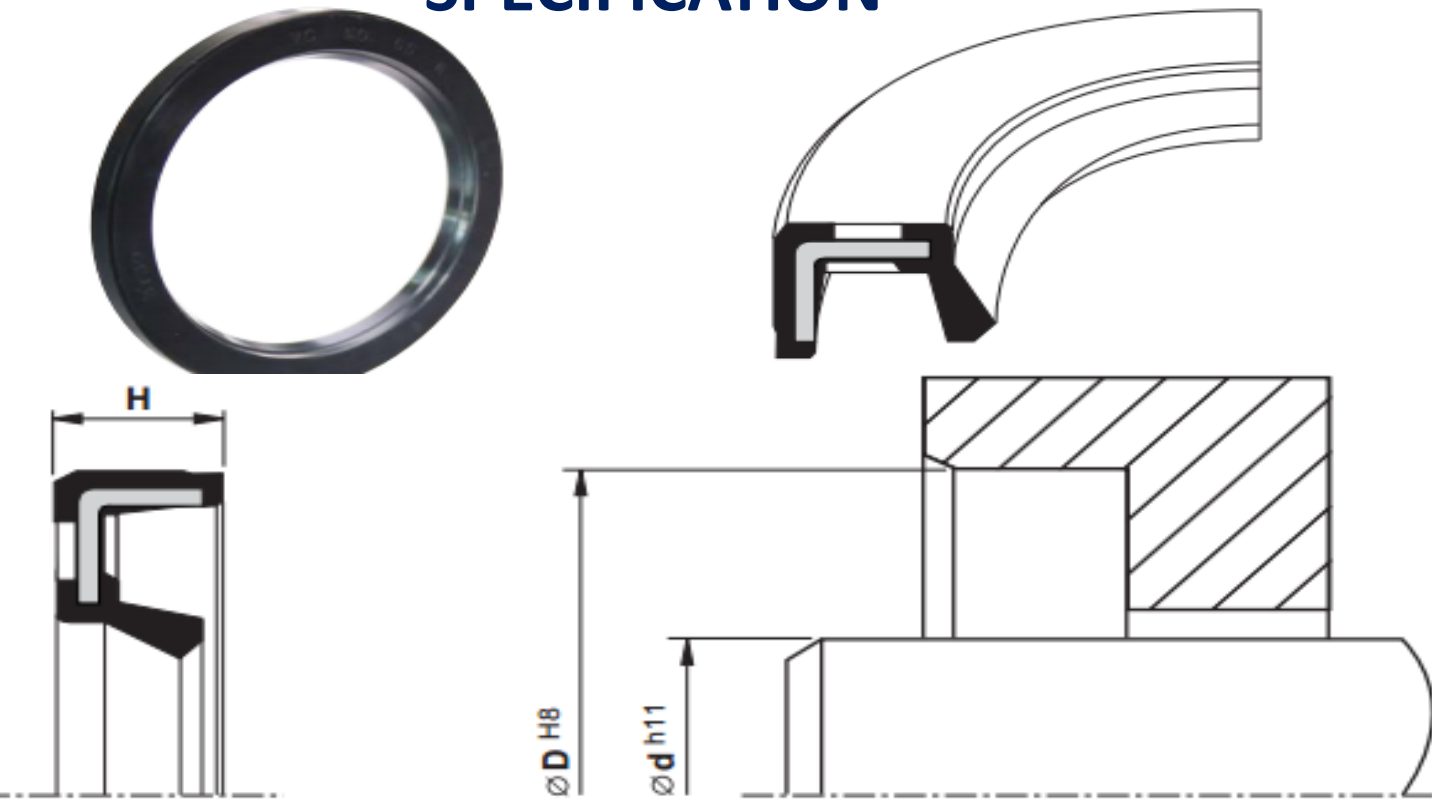

- Good static sealing and thermal expansion compensation.
- Low friction and low heat generation.

Material : NBR – METAL , Pressure (Bar):5 , Temp. (°C) : -4-+ 100

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : VB

SEALPRO
mechanical seal

SPECIFICATION

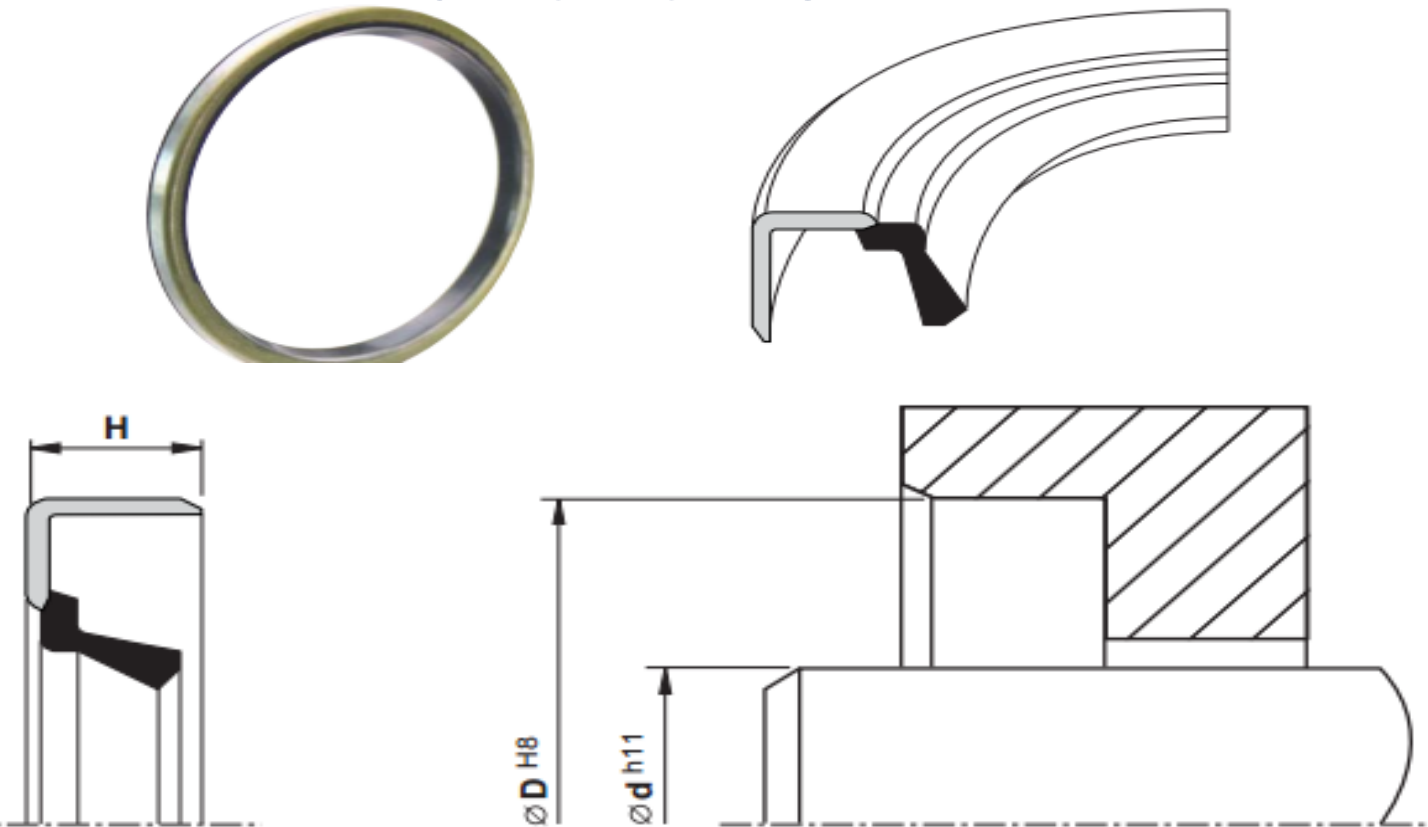

- Good radial stiffness.
- Good fitting stability.

Material : NBR – METAL , Pressure (Bar): 0.5 , Temp. (°C) : -35+ 100

H=..... D=..... d=.....




www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

ออยซีล : UN, UN/SF

SEALPRO
mechanical seal

SPECIFICATION

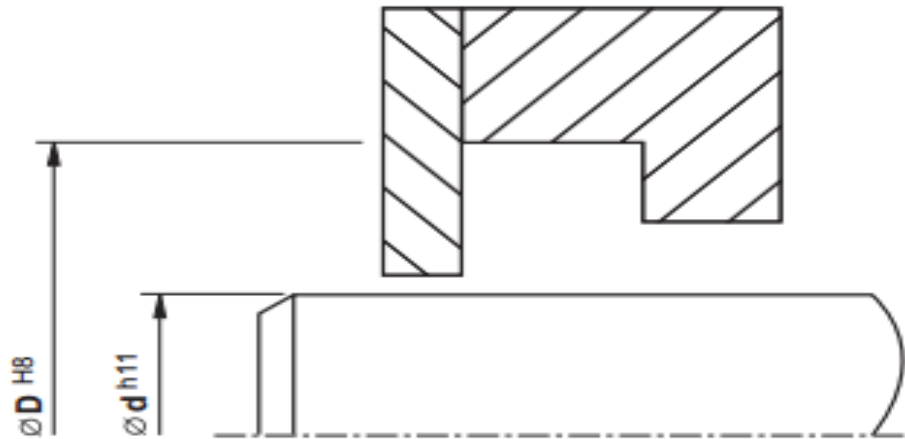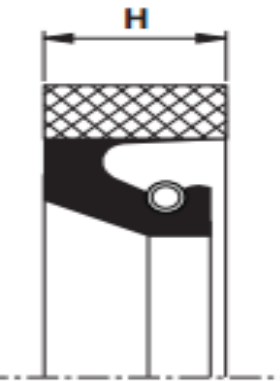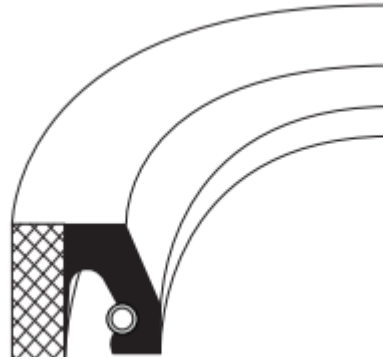

- Self lubricating rubber lip.
- Easy fitting and dismountings
- Abrasion resistant.
- Supplied endless or split

Material : NBR – FRABRIC , Pressure (Bar): 0.5 , Temp. (°C) : -35+ 100

H=..... D=..... d=.....


www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com

PTFE Lip Seal

SEALPRO
mechanical seal

SPECIFICATION

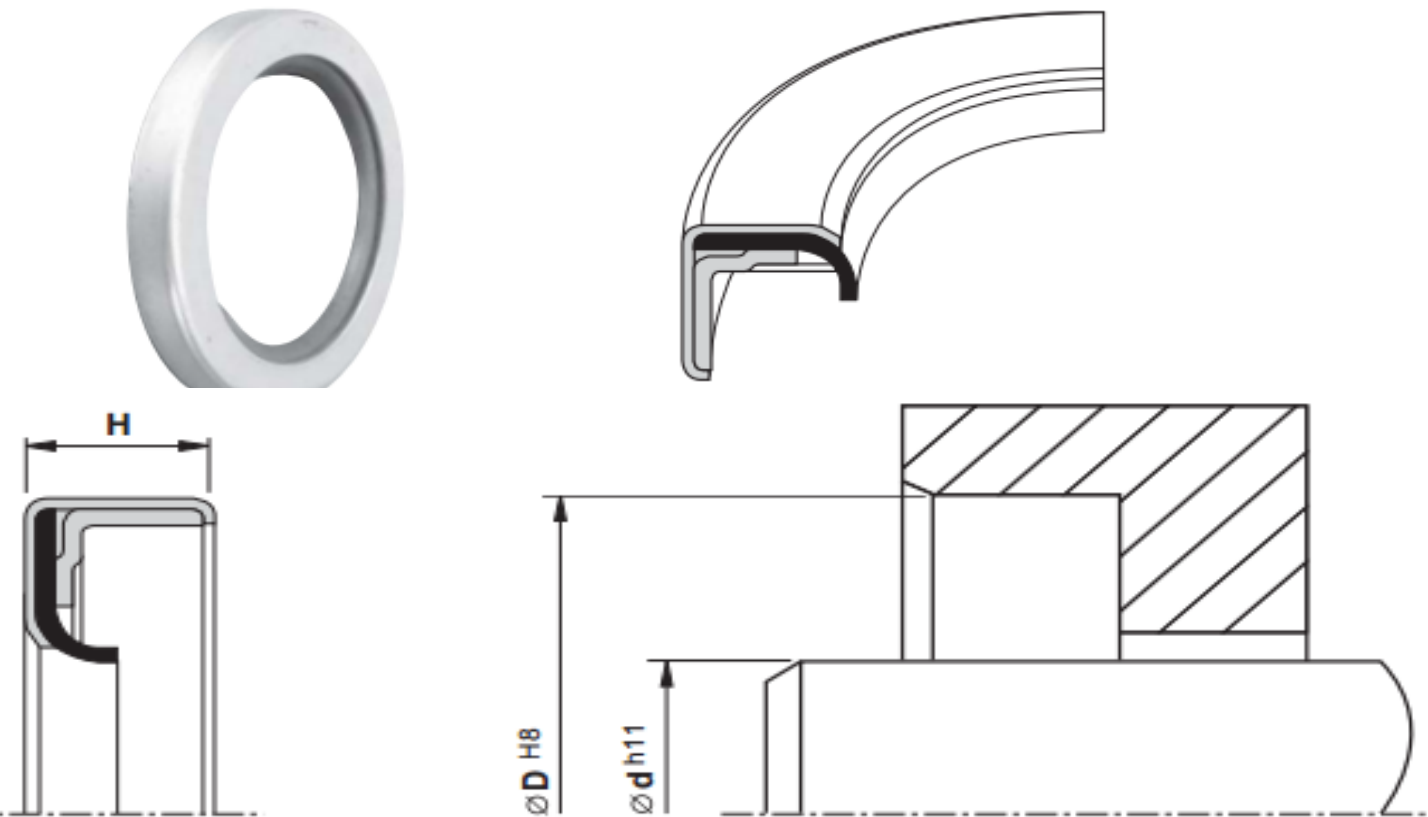

- Low Friction seal material.
- Stick slip free running.
- low and high temperature range.
- Wide media compatibility .

Material : STAINLESS-PTFE , Pressure (Bar): 2 , Temp. (°C) : -60 + 200

H=..... D=..... d=.....

www.sealpro.co.th

Direct Line 086-461-9629 Email: sealprocompany@gmail.com