


Type W01

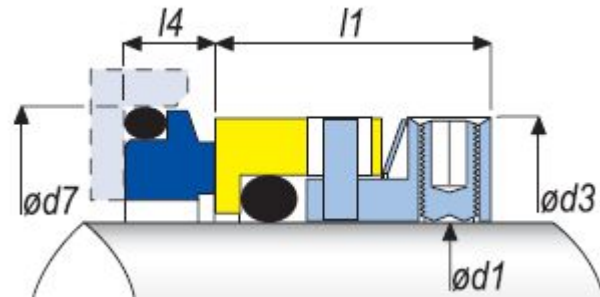

| d1 | | d3 | | d7 | | l1 | | l4 | |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Metric | Inches | Metric | Inches | Metric | Inches | Metric | Inches | Metric | Inches |
| 15.8 | 0.625 | 27.0 | 1.063 | 28.5 | 1.125 | 19.1 | 0.750 | 6.3 | 0.250 |
| 16.0 | 0.630 | 27.0 | 1.063 | 28.5 | 1.125 | 19.1 | 0.750 | 6.3 | 0.250 |
| 19.1 | 0.750 | 30.0 | 1.181 | 31.7 | 1.250 | 19.1 | 0.750 | 6.3 | 0.250 |
| 24.0 | 0.945 | 34.1 | 1.343 | 35.4 | 1.396 | 19.1 | 0.750 | 7.6 | 0.300 |
| 28.0 | 1.102 | 40.0 | 1.575 | 42.0 | 1.654 | 19.1 | 0.750 | 7.6 | 0.300 |
| 28.6 | 1.125 | 39.5 | 1.555 | 41.2 | 1.625 | 19.1 | 0.750 | 7.6 | 0.300 |
| 30.0 | 1.181 | 41.0 | 1.614 | 42.7 | 1.681 | 19.1 | 0.750 | 7.6 | 0.300 |
| 31.7 | 1.250 | 42.4 | 1.669 | 44.2 | 1.742 | 19.1 | 0.750 | 7.6 | 0.300 |
| 32.0 | 1.260 | 42.4 | 1.669 | 44.4 | 1.750 | 19.1 | 0.750 | 7.6 | 0.300 |
| 35.0 | 1.375 | 45.5 | 1.791 | 47.6 | 1.875 | 19.1 | 0.750 | 7.6 | 0.300 |
| 38.0 | 1.500 | 51.8 | 2.039 | 53.9 | 2.125 | 21.1 | 0.831 | 8.1 | 0.319 |
| 44.4 | 1.750 | 58.2 | 2.291 | 60.3 | 2.375 | 21.1 | 0.831 | 8.1 | 0.319 |
| 47.6 | 1.875 | 61.4 | 2.417 | 63.5 | 2.500 | 21.1 | 0.831 | 8.1 | 0.319 |
| 50.0 | 1.969 | 61.9 | 2.437 | 63.9 | 2.518 | 21.1 | 0.831 | 8.1 | 0.319 |
| 50.8 | 2.000 | 64.6 | 2.543 | 66.6 | 2.625 | 22.1 | 0.870 | 9.6 | 0.378 |
| 53.9 | 2.125 | 71.0 | 2.795 | 73.0 | 2.875 | 22.1 | 0.870 | 9.6 | 0.378 |
| 54.0 | 2.125 | 71.0 | 2.795 | 73.9 | 2.911 | 22.1 | 0.870 | 9.6 | 0.378 |
| 54.6 | 2.150 | 72.0 | 2.835 | 75.0 | 2.953 | 22.1 | 0.870 | 9.6 | 0.378 |
| 55.0 | 2.165 | 72.0 | 2.835 | 75.0 | 2.953 | 22.1 | 0.870 | 9.6 | 0.378 |
| 63.0 | 2.480 | 79.3 | 3.122 | 83.0 | 3.268 | 25.8 | 1.016 | 9.1 | 0.358 |
| 63.5 | 2.500 | 79.3 | 3.122 | 88.9 | 3.500 | 25.8 | 1.016 | 9.1 | 0.358 |
| 69.8 | 2.750 | 88.9 | 3.500 | 95.2 | 3.750 | 25.8 | 1.016 | 9.1 | 0.358 |
| 73.0 | 2.875 | 94.0 | 3.701 | 98.4 | 3.875 | 25.8 | 1.016 | 9.1 | 0.358 |
| 75.0 | 2.953 | 96.0 | 3.780 | 100.4 | 3.954 | 25.8 | 1.016 | 9.1 | 0.358 |

Material Face:

Rotary Face : Carbon ,Silicon Carbide

Stationary Face: Tungsten ,Silicon Carbide

Elastomer :NBR , Viton,PTFE

Operation Limited:

Speed : 15 m/s

Pressure : 180psi

Temp:-40 to 200 C