


Type M74D



LINE

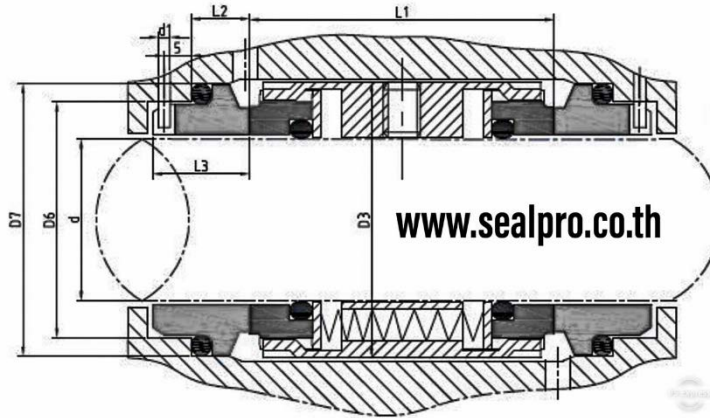

Material :

Inboard

- Rotary Face : **SiC**
- Stationary Face : **SiC**
- Body : **316SS**
- Spring : **316SS**
- Elastomer : **Viton**

Outboard

- Rotary Face : **SiC**
- Stationary Face : **SiC**
- Body : **316SS**
- Spring : **316SS**
- Elastomer : **Viton**

Size/Metric	d	D6	D7	D3	d1	L1	L2	L3
18	18	27	33	33	3	38.0	11.5	19.5
20	20	29	35	35	3	38.0	11.5	19.5
22	22	31	37	37	3	38.0	11.5	19.5
24	24	33	39	39	3	38.0	11.5	19.5
25	25	34	40	40	3	38.0	11.5	19.5
28	28	37	43	43	3	39.0	11.5	19.5
30	30	39	45	45	3	39.0	11.5	19.5
32	32	42	48	47	3	39.0	11.5	19.5
33	33	42	48	48	3	39.0	11.5	19.5
35	35	44	50	50	3	39.0	11.5	19.5
38	38	49	56	55	4	41.0	14.0	22.0
40	40	51	58	57	4	42.0	14.0	22.0
43	43	54	61	60	4	42.0	14.0	22.0
45	45	56	63	62	4	42.0	14.0	22.0
48	48	59	66	65	4	42.0	14.0	22.0
50	50	62	70	67	4	43.0	15.0	23.0
53	53	65	73	70	4	43.0	15.0	23.0
55	55	67	75	72	4	43.0	15.0	23.0
58	58	70	78	79	4	56.0	15.0	23.0
60	60	72	80	81	4	56.0	15.0	23.0
63	63	75	83	84	4	55.0	15.0	23.0
65	65	77	85	86	4	55.0	15.0	23.0
68	68	81	90	89	4	55.0	18.0	26.0
70	70	83	92	91	4	56.0	18.0	26.0
75	75	88	97	99	4	56.0	18.0	26.0
80	80	95	105	104	4	56.0	18.2	26.2
85	85	100	110	109	4	56.0	18.2	26.2
90	90	105	115	114	4	56.0	18.2	26.2
95	95	110	120	119	4	56.0	17.2	25.2
100	100	115	125	124	4	56.0	17.2	25.2

Operation Limited:

- Speed : 20 m/s
- Pressure : 200psi
- Temp: -40 to 200 C